

LED Surface Emergency



ECO FRIENDLY
Ni-Mh BATTERY



HIGH
POWER FACTOR
> 0.90




HIGH LUMEN



HEL-TH56LED

Easy installation, no additional brackets required.
Suitable for various indoor environments such as industrial, shopping mall car park, concrete surface and corridor.

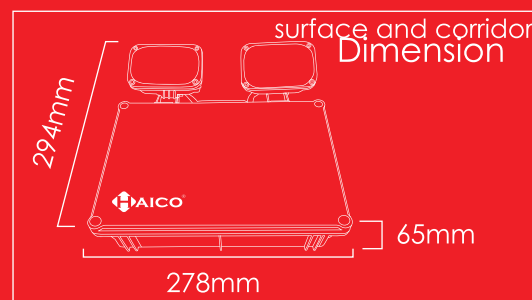

MODEL : HEL-TH56LED

MODE	: NON-MAINTAINED MODE	SELF CONTAINED LUMINAIRE
BATTERY	: NI-MH AA 3.6V 1200 MAH	SURFACE EMERGENCY LIGHT
LAMP	: 56 x 0.2W OSRAM SMD LED	MOUNTING HEIGHT : 3M TO 8M
RATED LUMEN	: 195lm	POWER : 2.3W
VOLTAGE	: 240V 50/60Hz	POWER FACTOR : 0.92
DURATION	: 3 HOURS	INPUT CURRENT : 0.01A
TEST STANDARD	MS IEC 60598-1:2012 & MS 619-2-22:2005	
DIMENSION	294mm x 278mm x 65mm	
SAFETY FEATURE	Low-voltage cut-off to prevent over-discharge of battery	
CONSTRUCTION	Injection moulded fire retardant Polycarbonates housing with clear reeded diffuser	

